

Cost-effective Rollover Protective Structure (CROPS)

for Wheeled Agricultural Tractors

FORD 8N SERIES

TESTING INFORMATION

This testing report was updated in March 2021.

This report provides enhanced information on the testing procedures and data collected by NIOSH. Specific report updates include tractor chassis information, static testing information and the reasoning for the testing.



**Centers for Disease Control
and Prevention**
National Institute for Occupational
Safety and Health

This document is in the public domain and may be freely copied or reprinted.

Disclaimer

Mention of any company or product does not constitute endorsement by the National Institute for Occupational Safety and Health (NIOSH). In addition, citations to Web sites external to NIOSH do not constitute NIOSH endorsement of the sponsoring organizations or their programs or products. Furthermore, NIOSH is not responsible for the content of these Web sites. All Web addresses referenced in this document were accessible as of the publication date.

Get More Information

Find NIOSH products and get answers to workplace safety and health questions:

1-800-CDC-INFO (1-800-232-4636) | TTY: 1-888-232-6348

CDC/NIOSH INFO: [cdc.gov/info](https://www.cdc.gov/info) | [cdc.gov/niosh](https://www.cdc.gov/niosh)

Monthly NIOSH eNews: [cdc.gov/niosh/eNews](https://www.cdc.gov/niosh/eNews)

Static testing of a fully assembled NIOSH CROPS was performed at the NIOSH Division of Safety Research laboratories in Morgantown, West Virginia, and in accordance with testing criteria outlined in SAE J2194. The main purpose of the static laboratory testing was to simulate field upset in a controlled and repeatable environment (SAE J2194). The static loading sequence consisted of four tests: (1) longitudinal loading, (2) 1st vertical crush loading, (3) transverse loading, and (4) 2nd vertical crush loading. During any of the four phases of static testing, the CROPS cannot be altered (e.g., bolts tightened, material repairs) and cannot touch or enter the operator clearance zone.

During the static laboratory testing, the loads were applied slowly over time, with the applied force and corresponding displacement collected. From these measurements, the energy absorbed by the CROPS was calculated (see graphs).

The photos show the condition of the tested CROPS at the beginning and the end of each of the four static tests.

General Testing Information

Date(s): CROPS Testing - 4/24/2008, 4/28/2008, 4/29/2008

Laboratory: NIOSH High Bay Lab
1095 Willowdale Rd
Morgantown, WV 26505

Conducted by: Division of Safety Research/Protective Technology Branch
Engineering Staff

Machine manufacturer: Ford 8N

ROPS manufacturer: NIOSH
1095 Willowdale Rd
Morgantown, WV 26505

Testing Background

An energy absorbing CROPS test was conducted between 04/24/2008 and 04/29/2008 following the industry standard that was current in 2008, SAE J2194. This test was a retest of the CROPS design with the main difference of reducing the base plates from $\frac{3}{4}$ in thickness to $\frac{1}{2}$ in thickness. This change was performed to make the CROPS more manufacturable.

Specification of the Test Machine

Chassis: Ford 8N
Reference Mass (mt): 4718 lbs.

Specification of the CROPS

CROPS Identification: CROPS with ½ inch base plates
ROPS Design/Test Type: Energy-Absorbing

Required Energy Absorption:

Longitudinal Loading: $E_{il,1} = (1.4) \text{ mt}$ 26517 in-lbs.
Side Loading: $E_{is} = (1.75) \text{ mt}$ 33147 in-lbs.
Vertical Crush Loading: $F_R = (20) \text{ mt}$ 9622 lbs.

Extension to Other Machines: Ford 2N, Ford 9N

Test Equipment

Description of the load application devices:

The horizontal loads were applied by means of a hydraulic cylinder. The flow rate to the hydraulic cylinder was controlled to maintain the static nature of the test, as described in SAE J2194. The vertical crush load was applied with two hydraulic cylinders mounted on each end of a steel I-beam that was installed across the top of the CROPS.

Description of the laboratory instrumentation:

The instrumentation used for this test was:

- A 20,000 lb. load cell attached to the end of a hydraulic cylinder, which was used to measure the force being applied to the CROPS for the longitudinal and transverse testing.
- Two 20,000 lb. load cells attached to the ends of separate hydraulic cylinders, which were used to measure the applied crushing loads in the vertical testing.
- An LVDT (linear variable differential transducer), which was used to measure displacement of the CROPS throughout the testing.
- An MTS 458.20 MicroConsole, which controlled the applied forces.

Data Collection and Computation

- The test LVDT measurements and energy calculation of the testing were performed by a LabView program. The Simpson rule for integration was used to calculate the energy for the testing and outputted the data to a CSV file for analysis.
- The permanent deflection distance data was recorded by hand.

CROPS test temperature and description of how CROPS temperature/material options were met, the language below is taken from the SAE J2194 Standard, ROPS in this section is used synonymously with CROPS:

All material used for the ROPS met the requirements of SAE J2194 6.9 Material Requirements. The ROPS tests were performed at ambient temperature.

- All fasteners used to attach the ROPS to the tractor frame and to connect structural parts of the ROPS were SAE grade 5 through 8 or equivalent.
- All steel material used in the ROPS met the minimum Charpy V-notch impact energy requirements specified.
- All welding electrodes used in fabrication of structural members and mounts were compatible with the ROPS material.

Test Load Sequence



1. Longitudinal loading from the rear (left side of machine)
2. Vertical crush load
3. Transverse loading from the side (right side of machine)
4. Vertical crush load

Test Setup

The tractor was bolted to a 20,000-pound test bed via custom manufactured mounting structures to simulate the tractor wheel height and to keep the tractor from moving during the test procedure.

Between the testing sequence, the tractor was rotated such that the hydraulic cylinder could be positioned in the appropriate location for each of the 4 tests. This test set up is shown in the testing sequence pictures that follow.

CROPS Testing Information, Ford 8N Series

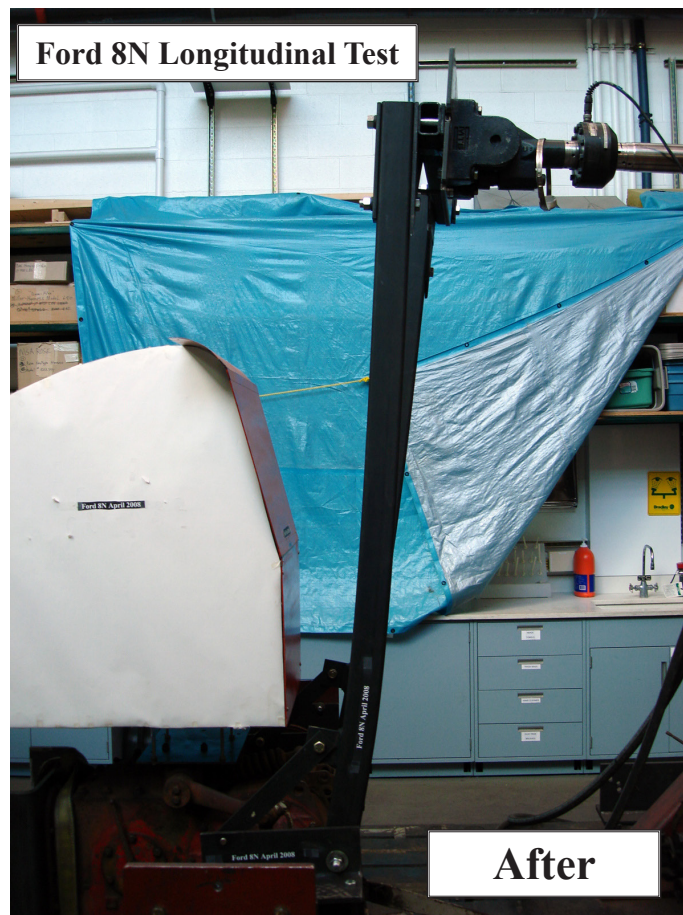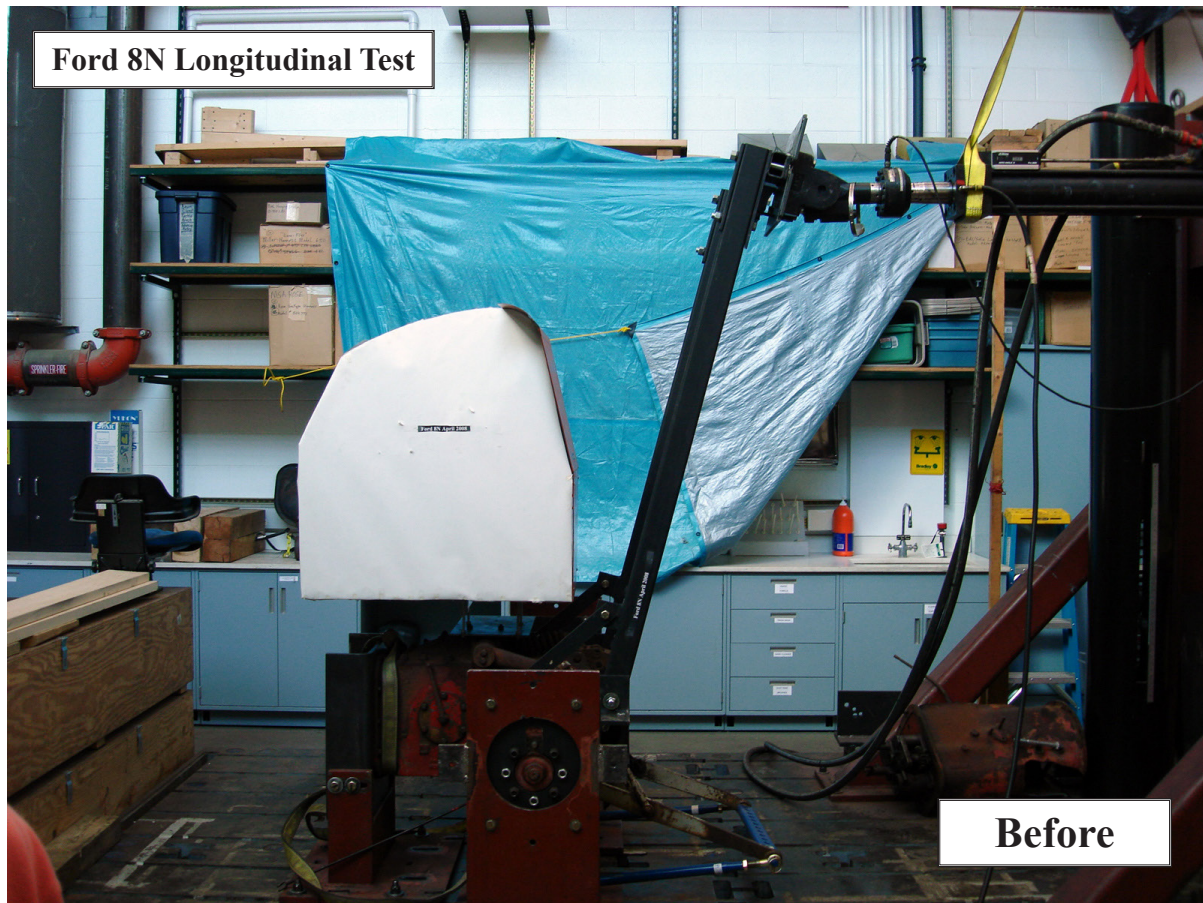


CROPS Testing Information, Ford 8N Series

CROPS Lab Testing April 2008 Ford 8N Series


Ford 8N Longitudinal Test

April 24, 2008

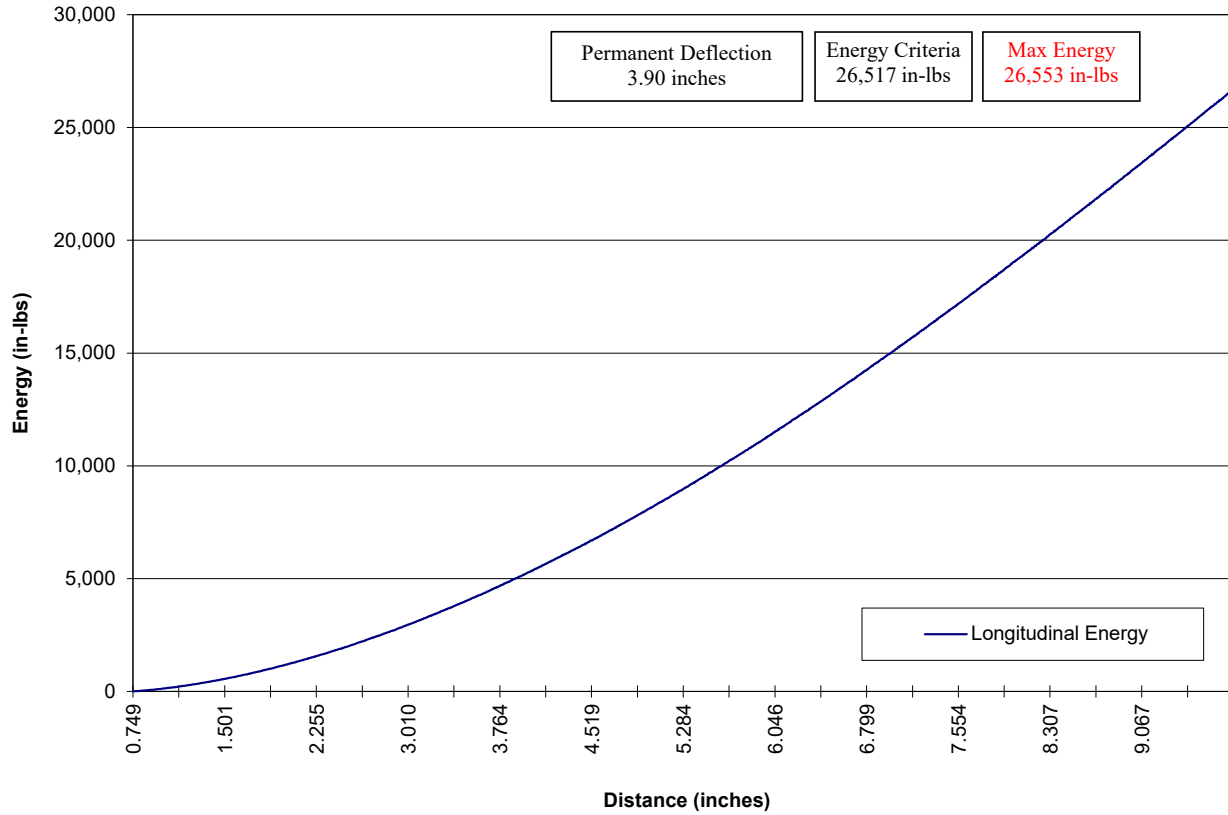

CROPS Testing Information, Ford 8N Series

Ford 8N Vertical Crush #1

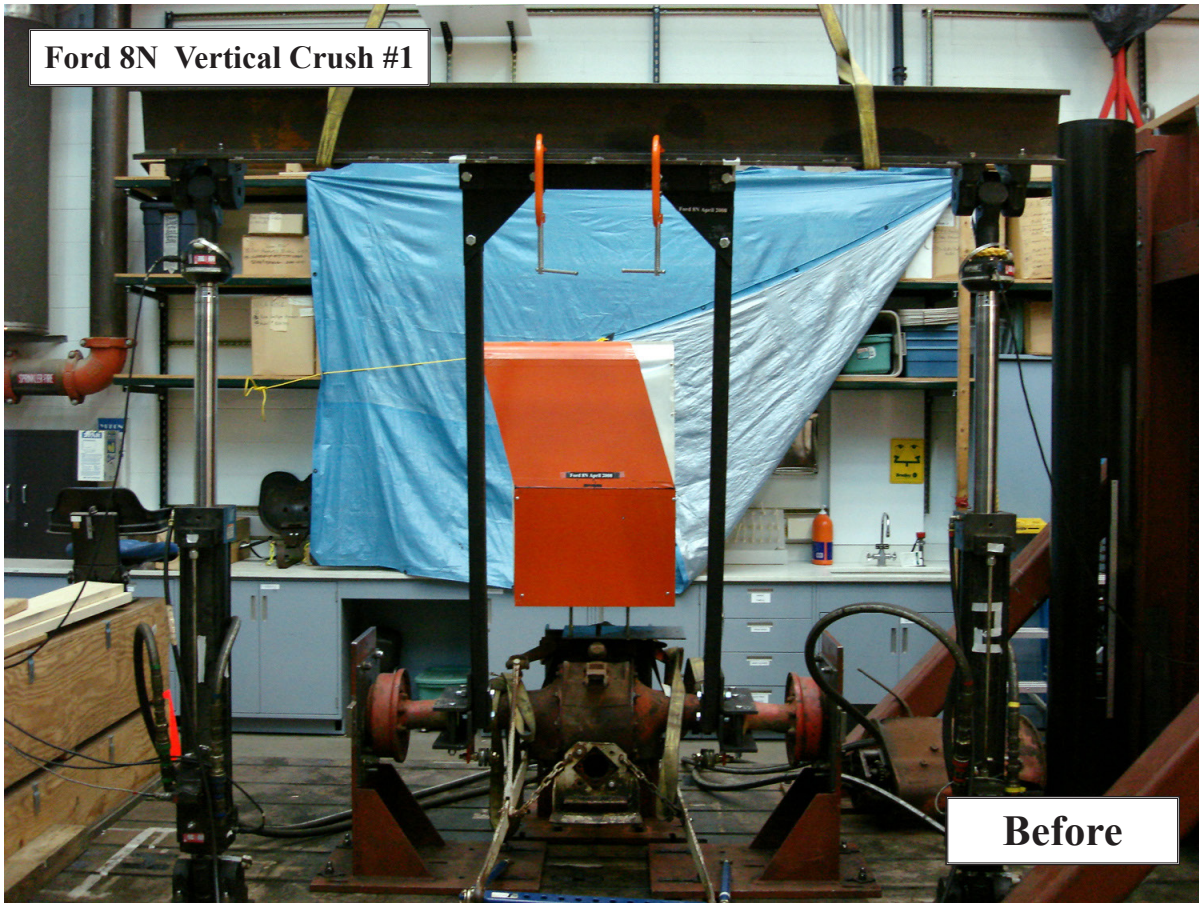

Before

Ford 8N Vertical Crush #1




After

CROPS Testing Information, Ford 8N Series

CROPS Lab Testing April 2008 Ford 8N Series



Ford 8N Vertical Crush #1

April 28, 2008

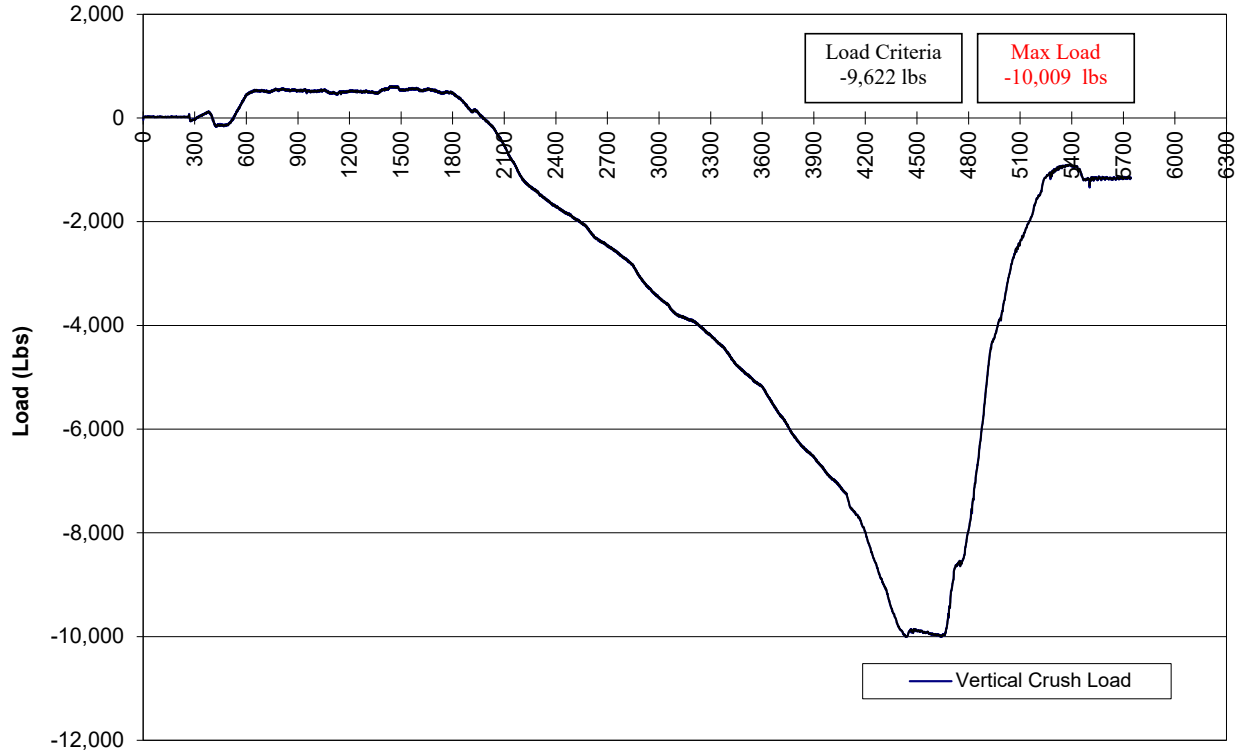

Data Points

CROPS Testing Information, Ford 8N Series

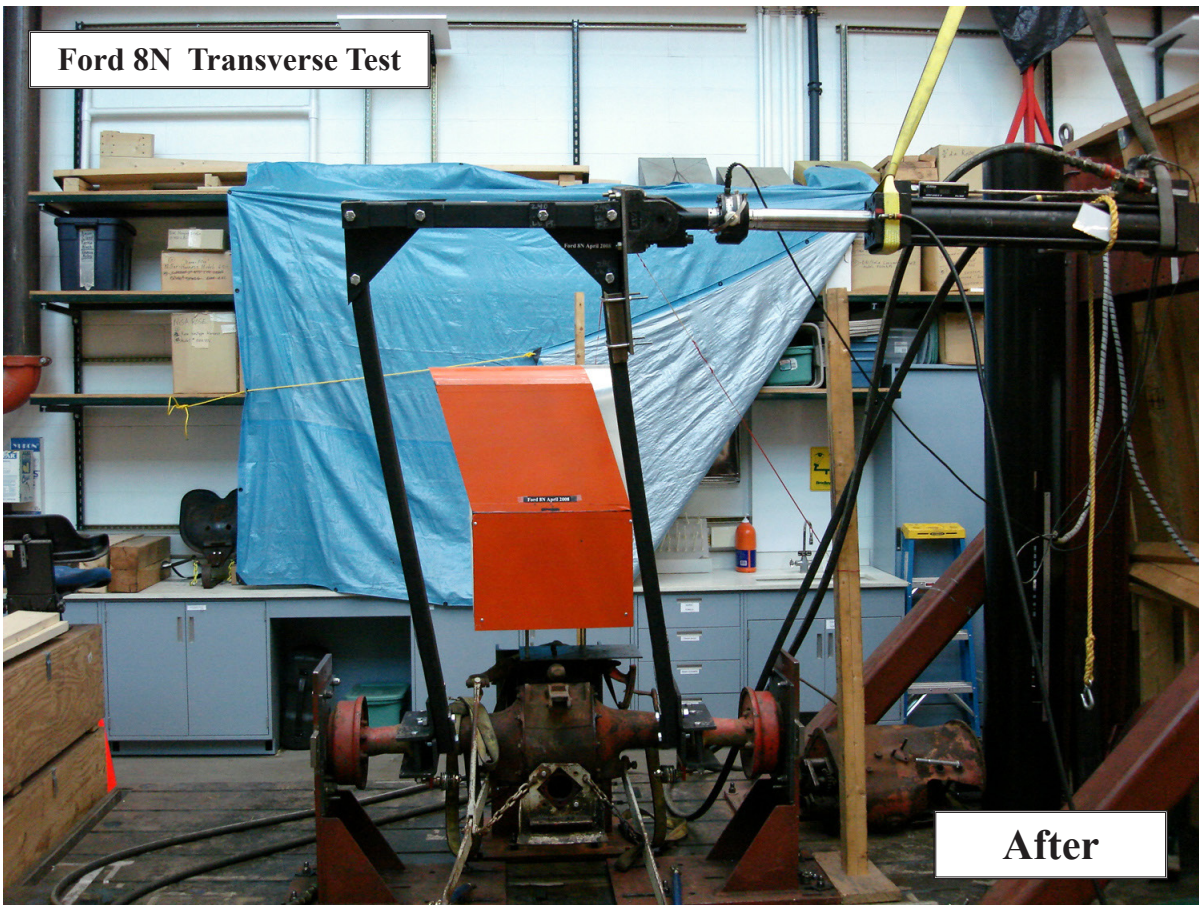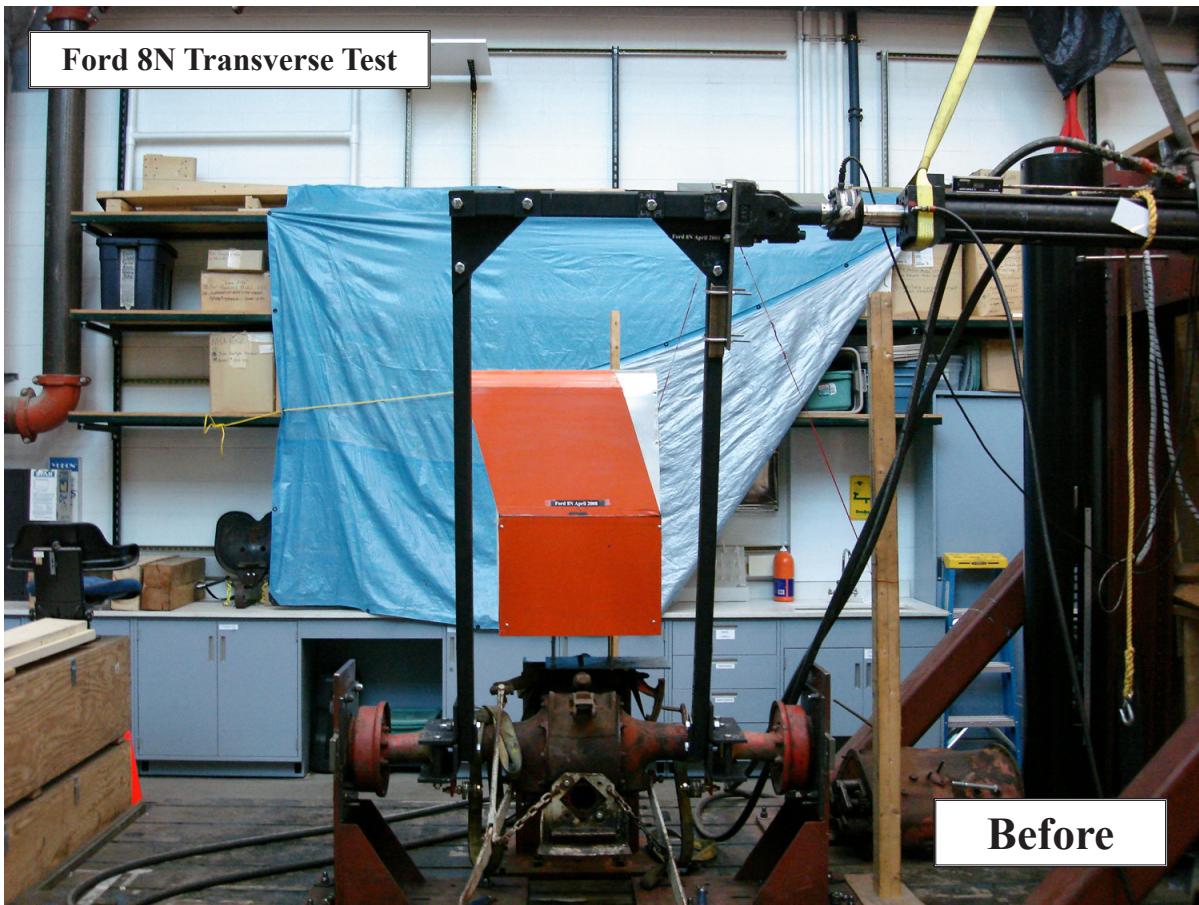


CROPS Testing Information, Ford 8N Series

CROPS Lab Testing April 2008 Ford 8N Series


Ford 8N Transverse Test

April 28, 2008

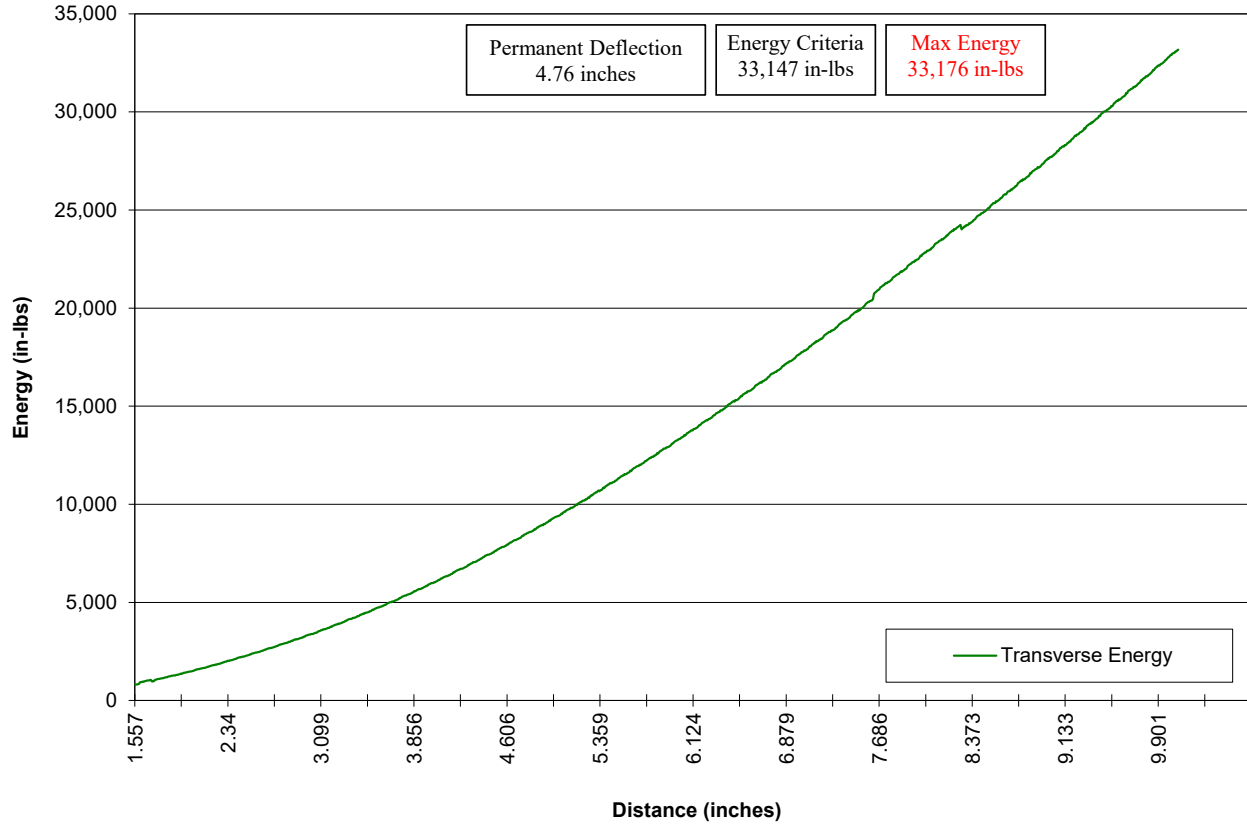


CROPS Testing Information, Ford 8N Series

Ford 8N Vertical Crush #2

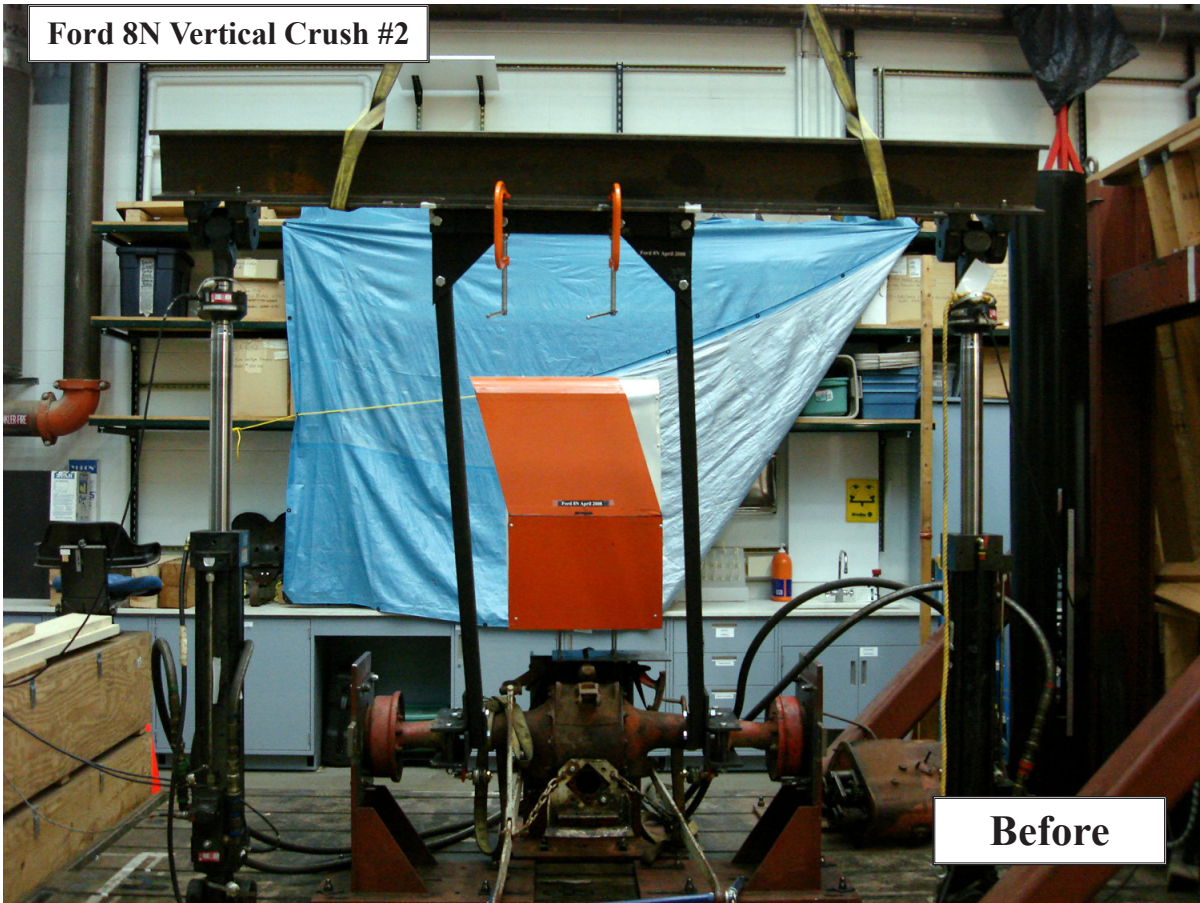

Before

Ford 8N Vertical Crush #2

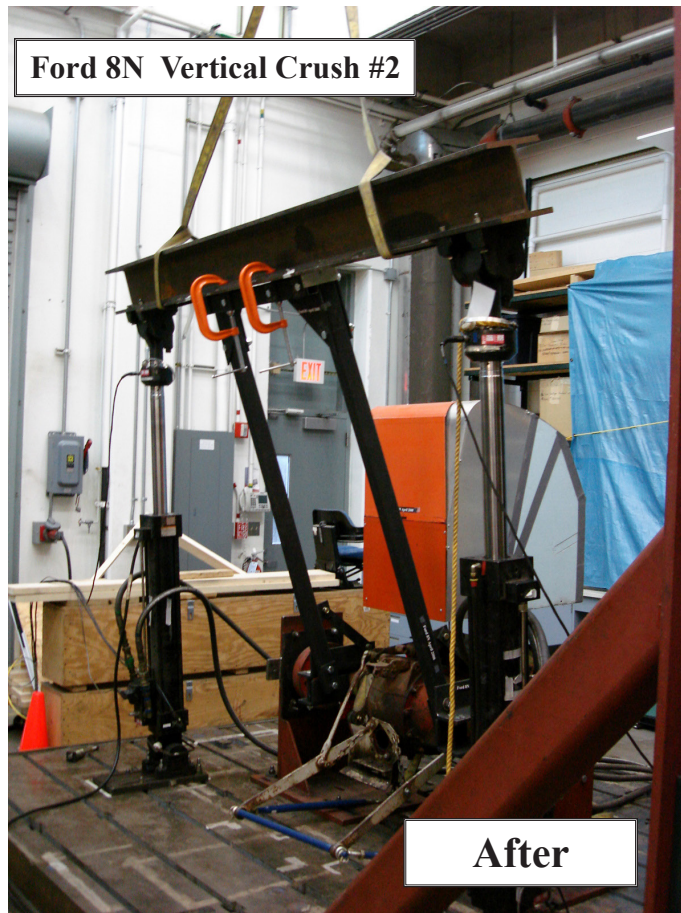


After

CROPS Testing Information, Ford 8N Series

CROPS Lab Testing April 2008 Ford 8N Series

Ford 8N Vertical Crush #2

April 29, 2008

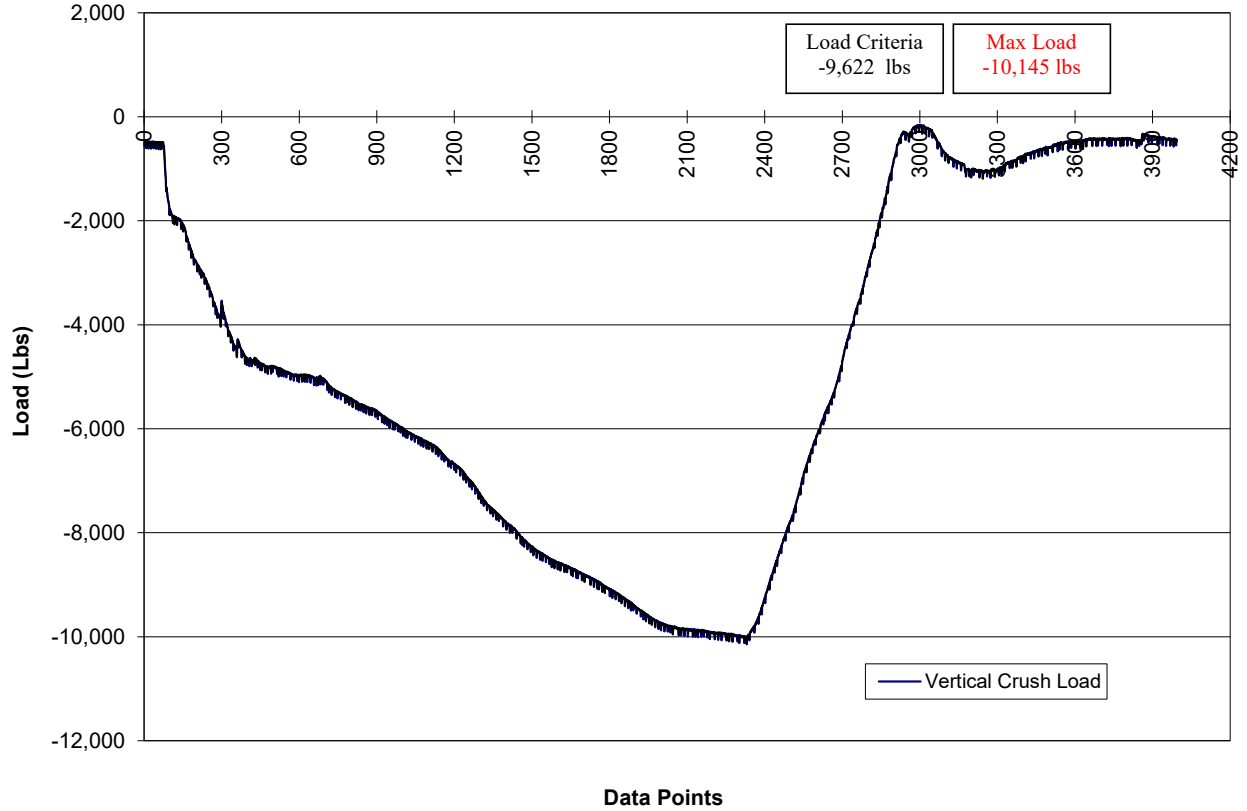



**“Promoting productive workplaces
through safety and health research”**